

(12) PATENT APPLICATION
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 198539229 A1
(10) Patent No. 574437

(54) Title
BREAK-AWAY STIRRUP

(51) International Patent Classification(s)
B68C 003/02 A01N 043/653

(21) Application No: 198539229 **(22) Date of Filing: 1985.02.27**

(30) Priority Data

(31) Number PG3855 **(32) Date 1984.03.01** **(33) Country AU**

(43) Publication Journal Date: 1985.09.05


(44) Accepted Journal Date: 1988.07.07

(71) Applicant(s)
Gratehand Pty. Ltd.

(54) Inventor(s)
Gregory Alwyn Taylor

APPLICATION ACCEPTED AND AMENDMENTS
16.5.88

39229/85
COMMONWEALTH OF AUSTRALIA
Patents Act 1992
574437
**APPLICATION FOR A STANDARD PATENT
OR A STANDARD PATENT OF ADDITION**



SECTION 34(4)(a) DIRECTION SEE FOLIO 10
NAME DIRECTED GRATEHAND PTY LIMITED, of Suite 28,
The Concord Centre, 103-115 Majors Bay Road, Concord,
New South Wales

hereby apply for the grant of a standard patent for an invention entitled SAFETY STIRRUP
~~patent of addition~~

which is described in the accompanying provisional specification.
~~complete~~



*(To be included in the case of a Convention application)

Details of basic application(s) -

Number of basic application

Name of Convention country in which basic application was filed

Date of basic application

*(To be included in the case of an application made by virtue of section 51)

Number of original application

Person by whom made

*(To be included in the case of an application for a patent of addition)

I request that the patent may be granted as a patent of addition to the patent applied for on Application

No. Patent No.

in the name of



I request that the term of the patent of addition be the same as that for the main invention or so much of
the patent for the main invention as is unexpired.

**ADDRESS FOR SERVICE
ALTERED**

My address for service is 4 19 CAREMA PLACE, CIVIC ACT. 2601

SAUNDERS, FERGUSON, SYDNEY N.S.W.

Dated this 1ST day of MARCH 19 84

To :

THE COMMISSIONER OF PATENTS

AUSTRALIAN

1 MAR 1984

PATENT OFFICE

(Signature)

This form must be accompanied by either a provisional specification (Form 9 and true copy) or by a complete specification (Form 10 and true copy).

COMPLETE EITHER PROVISIONAL SPECIFICATION No. 39229/85

* These sections are to be completed only where applicable..

C. J. THOMPSON, Commonwealth Government Printer

39229/85

Patents Act 1952

DECLARATION IN SUPPORT OF AN APPLICATION FOR A PATENT

In support of the Application made by G. A. TAYLORfor a patent for an invention entitled SAFETY STIRRUPI, GREGORY A TAYLOR
of 5/8 LONGERENONG ST. FARRER ACT

do solemnly and sincerely declare as follows:—

1. I am the applicant for the patent.

*(or, in the case of an application by a body corporate)*1. I am authorized by _____
the applicant for the patent to make this declaration on its behalf.

2. I am the actual inventor of the invention.

*(or, where a person other than the inventor is the applicant)*2. _____
of __________ is the actual inventor of the invention and the
facts upon which I am
the _____ is entitled to make the application are as follows:—

_____Declared at CANBERRA this FIRST day of MARCH, 1984

TO:

THE COMMISSIONER OF PATENTS.

Greg Taylor
(Signature of Declarant)

(IMPORTANT - Cross out inapplicable words in the above Form.)

(12) **PATENT ABRIDGMENT** (11) Document No. **AU-B-39229/85**
(19) **AUSTRALIAN PATENT OFFICE** (10) Acceptance No. **574437**

(54) Title
BREAK-AWAY STIRRUP

(51)4 International Patent Classification
B68C 003/02 A01N 043/653

(21) Application No. : **39229/85** (22) Application Date : **01.03.84**

(23) Filing Date of Complete Specification : **27.02.85**

(43) Publication Date : **05.09.85**

(44) Publication Date of Accepted Application : **07.07.88**

(60) Related to Provisional(s) : **PG3855**

(71) Applicant
GRATEHAND PTY. LTD.;

(72) Inventor
GREGORY ALWYN TAYLOR

(74) Attorney or Agent
SPRUSON & FERGUSON

(56) Prior Art Documents
55629/73 B68C 3/02

(57) Claim

1. A safety stirrup comprising:

a main body portion having two side arms which in use extend generally downwardly from a saddle strap in a spaced generally coextensive relationship with one of said arms at its upper end being adapted to be attached to said saddle strap;

a base extending between the lower extremities of said arms and pivotally supported by same; and

a foot engaging member fixed to the other arm, to said one arm, and extending therefrom so as to be located between said arms and above said base, and wherein said arms are releasably attached at their upper ends so that upon a lateral force being applied to said other arm, said arms disengage at their upper ends and said base and said other arm pivot to dislodge a rider's foot from within the stirrup by movement of said foot engaging member.

COMPLETE SPECIFICATION

(ORIGINAL)

FOR OFFICE USE :

39229/85


Application Number : PG3855
Lodged : 1 March 1984

Complete Specification Lodged :
Accepted :
Published :

Priority :

Related Art :

LODGED AT SUB-OFFICE
27 FEB 1985
Sydney

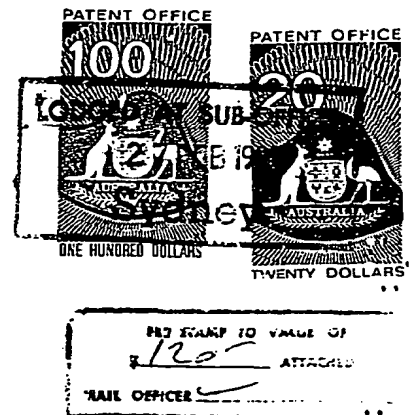

Name of Applicant(s): DONALD WILLIAM BURROWS, DONALD RAYMOND BURROWS,
ETHEL RAE BURROWS and KERRY FOSTER

Address of Applicant(s): all of 10 Ilma Street, Bankstown, New South Wales
2200, Australia

Actual Inventor(s): GREGORY ALWYN TAYLOR

This document contains the
amendments made under
Section 49 and is correct for
printing.

Address for Service : Spruson & Ferguson, Patent Attorneys, CBA Centre
60 Margaret Street, Sydney, New South Wales, 2000 Australia

Complete Specification for the invention entitled :
"SAFETY STIRRUP"

The following statement is a full description of this invention, including the best method of performing
it known to me/us :

ABSTRACT

A safety stirrup which has two arms arranged in a generally parallel co-extensive spaced relationship, a foot engaging base attached to one of the arms and supported by the other arm, and wherein the base and one of the arms are pivotally attached to the other arm so that upon a rider being dislodged from the saddle, the rider's foot will apply a transverse force to the stirrup thereby causing pivoting of the base to eject the rider's foot from within the stirrup.

This invention relates to safety stirrups.

When a rider is dislodged from the saddle, occasionally instead of being thrown clear, one of the rider's legs is caught at or about the ankle and retained in the stirrup. Consequently the rider may be dragged along the ground until the horse comes to rest voluntarily or otherwise. This can and does result in serious injury to the rider.

In order to overcome the above problem, several safety stirrups have been proposed. For example, safety stirrups are
10 described in U.S. Patents 3,555,781, 4,209,962 and 3,816,974.

U.S. Patent 3,555,781 merely describes a safety stirrup with one of the sides of the stirrup omitted. It is contended that when the rider is thrown from the horse, the missing side of the stirrup allows the rider's foot to clear the stirrup. U.S. Patent 4,209,962 describes a stirrup with the two sides of the stirrup being pivotally attached and joined by a base which is pivotally attached to one of the sides. Once the rider is thrown from the horse, the two sides of the stirrup pivot relative to each other thereby allowing disengagement of the
20 base and the release of the rider's foot. U.S. Patent 3,816,974 describes a stirrup with a main attachment portion to be fixed to the saddle and a foot engaging portion resiliently but removably attached to the main attachment portion. Upon the rider being thrown from the horse, the foot engaging portion is disengaged from the main attachment portion.

The above described earlier safety stirrups however are not totally effective in that the foot still does not clear the stirrup or alternatively the stirrup safety feature is activated in circumstances when the rider is not thrown from the horse.

30 It is the object of the present invention to overcome or

substantially ameliorate the above disadvantages.

There is disclosed herein a safety stirrup comprising:

a main body portion having two side arms which in use extend generally downwardly from a saddle strap in a spaced generally coextensive relationship with one of said arms at its upper end being adapted to be
5 attached to said saddle strap;

a base extending between the lower extremities of said arms and pivotally supported by same; and

a foot engaging member fixed to the other arm, ^{of said arms} ~~to said one arm~~,
10 and extending therefrom so as to be located between said arms and above said base, and wherein said arms are releasably attached at their upper ends so that upon a lateral force being applied to said other arm, said arms disengage at their upper ends and said base and said other arm pivot to dislodge a rider's foot from within the stirrup by movement of said foot
15 engaging member.

A preferred form of the present invention will now be described by way of example with reference to the accompanying drawings, wherein:

Figure 1 is a schematic parts exploded perspective view of a safety stirrup;

20 Figure 2 is a schematic perspective view of the safety stirrup of Figure 1 in an assembled condition and partly actuated to release a rider's foot from within the stirrup;

Figure 3 is a schematic perspective view of the stirrup of Figure 2 in a further actuated position; and

25 Figure 4 is a schematic side elevation of the stirrup of Figure 1 in a full release position.

In Figures 1 to 4 there is schematically depicted a safety stirrup 10 which consists of a main body portion 11 having two generally vertically extending parallel co-extensive



transversely spaced side arms 12 and 13. Formed integral with the arm 12 is an attachment portion 14 having an aperture 15 enabling the safety stirrup 10 to be attached to a saddle by means of a saddle strap. The upper extremity of the arm 13 is releasably secured to the attachment portion 14 by means of an aperture 16 formed in the attachment portion 14, and a pin 17 extending from the upper extremity of the arm 13. It should be appreciated that the aperture 16 and pin 17 extend downwardly at an angle so that the arm 13 is secured in position.

10 Attached to the lower extremities of the arms 12 and 13 is a foot supporting assembly 19 consisting of a foot engaging base 20 rigidly fixed to the lower extremity of the arm 13. The assembly 19 also includes a base frame 21, which extends generally between the lower extremities of the arms 12 and 13. Each end of the base frame 21 is provided with a passage 22 or 23 to receive a pivot pin 24 or 25. Additionally the lower extremities of the arms 12 and 13 are provided with passages 26 and 27 through which the pins 24 and 25 pass. Accordingly, the base frame 21 is pivotally attached to both the arms 12 and 13
20 at their lower extremities. Supported by the base frame 21 is a leaf spring 28 retained in position on the base frame 21 by means of a pin 29 which is received within an aperture 30 formed in the spring 28. The spring 28 is of a length so as to abut the planar surfaces 31 and 32 at the lower extremities of the arms 12 and 13 respectively. The pin 29 is formed integral with a cross member 33, of the base frame 21, so that the spring 28 is resiliently deformed when the safety stirrup 10 is in its normal working configuration. i.e. the spring 30 extends between the two planar surfaces 31 and 32 after passing above
30 the cross member 33. While in this position, the spring 28 is

in a bowed configuration thereby being pretensioned.

The lower extremity of the arm 12 is also formed with a step 34 upon which the extremity of the base 20 rests.

10 It should be appreciated from the above described preferred embodiment, that the spring 28 generally retains the safety stirrup 10 in the normal working configuration. Upon a rider applying sufficient force in a direction transverse of the arm 13 and outwardly relative to the horse, the arm 13 is caused to pivot, initially as depicted in Figure 2. This movement of the arm 13 will continue until the stirrup has the configuration of Figure 3, and if further release is required, the base frame 21 will pivot about the pin 24 until the safety stirrup 10 reaches the configuration depicted in Figure 4.

As can be seen from the above description, the base 20 is caused to pivot with the arm 13 thereby pushing the foot of the rider from within the stirrup 10. Still further, it should be appreciated that at arriving at the configuration of Figure 4, the spring 28 is further resiliently deformed.

20 The above described preferred embodiment of the present invention has the distinct advantage of having the base 24 movable so as to eject the rider's foot from within the stirrup 10.



The claims defining the invention are as follows:

1. A safety stirrup comprising:

a main body portion having two side arms which in use extend generally downwardly from a saddle strap in a spaced generally coextensive relationship with one of said arms at its upper end being adapted to be attached to said saddle strap;

a base extending between the lower extremities of said arms and pivotally supported by same; and

a foot engaging member fixed to the other arm, ^{of said arms} ~~to said one arm~~, and extending therefrom so as to be located between said arms and above said base, and wherein said arms are releasably attached at their upper ends so that upon a lateral force being applied to said other arm, said arms disengage at their upper ends and said base and said other arm pivot to dislodge a rider's foot from within the stirrup by movement of said foot engaging member.

2. The stirrup of Claim 1 further including resilient means biasing said arms to a normal working position retaining the rider's foot within the stirrup.

3. The stirrup of Claim 2 wherein said resilient means is a spring mounted on said base and engaging said arms to bias said arms to a normal working position retaining the rider's foot within the stirrup.

4. The stirrup of Claim 3 wherein said one arm has at its lower extremity a step upon which said foot engaging member rests during normal operation of the stirrup.

5. The stirrup of Claim 4 wherein the upper extremity of said other arm is provided with a pin, and said one arm is provided with a passage to receive said pin to releasably retain the upper ends of the arms together.

6. The stirrup of Claim 5 wherein said pin and passage extend in a direction at an acute angle to the horizontal.

7. The stirrup of Claim 6 wherein said spring is a leaf spring which abuts the lower extremities of the two arms.

8. A safety stirrup substantially as hereinbefore described with reference to the accompanying drawings.

DATED this TWELFTH day of FEBRUARY 1988

GRATEHAND PTY LTD


Patent Attorneys for the Applicants
SPRUSON & FERGUSON



DG:0052F

39229/85

FIG. 1

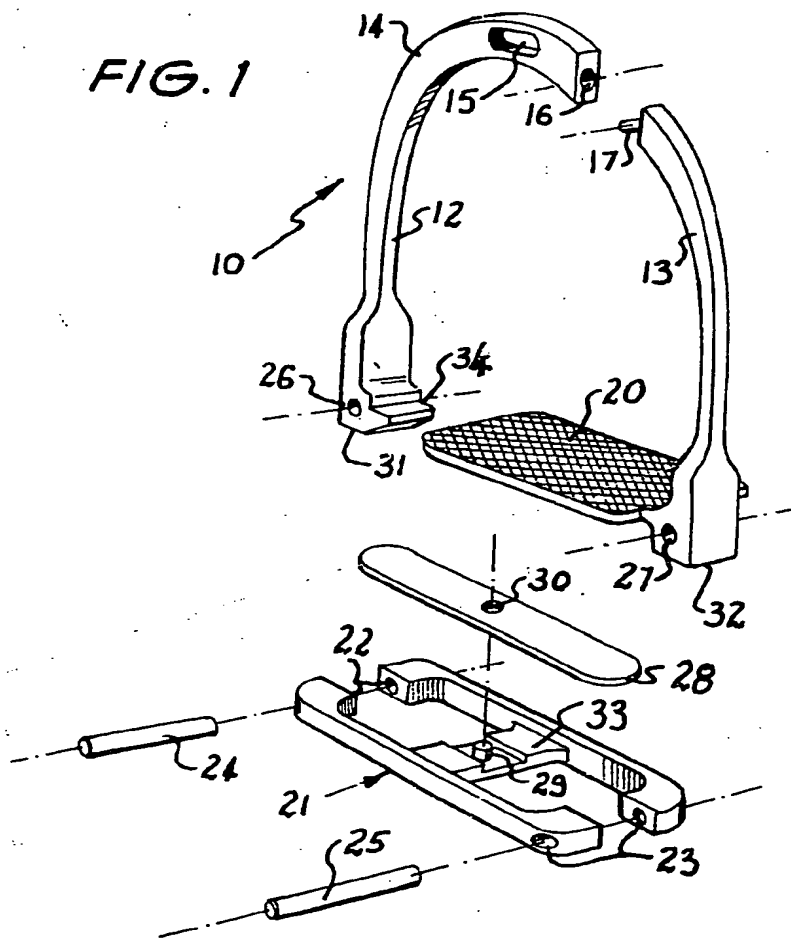

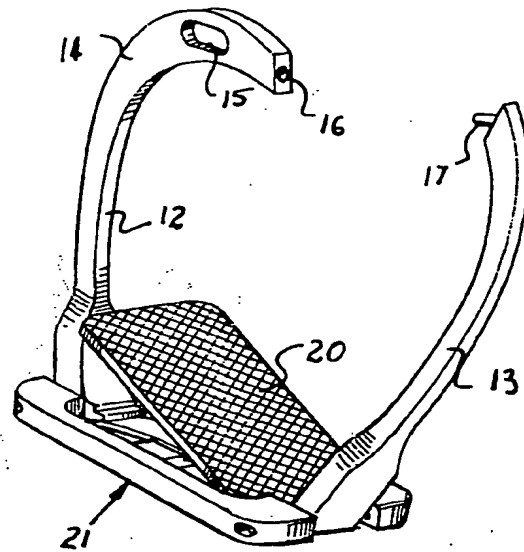


FIG. 2


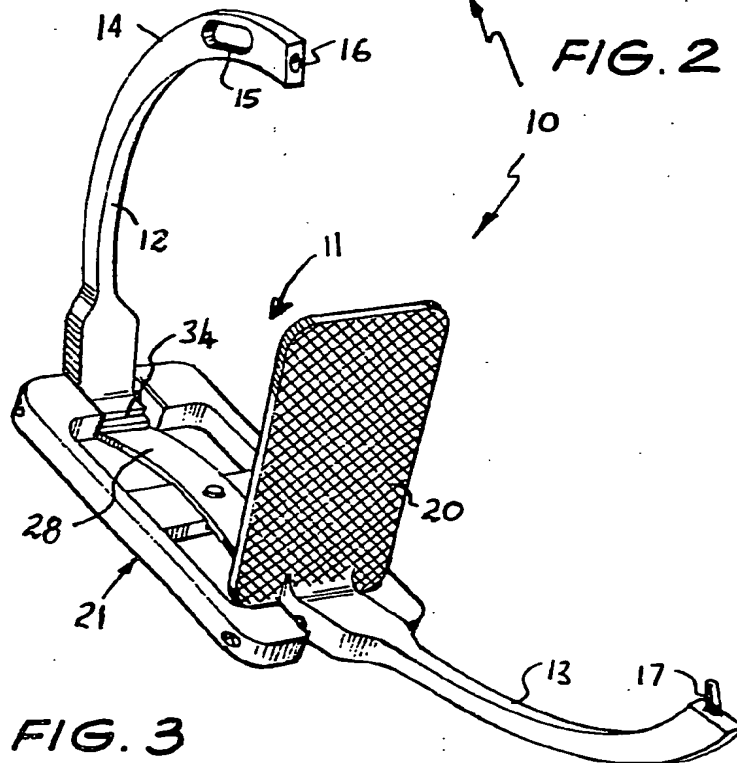


FIG. 3

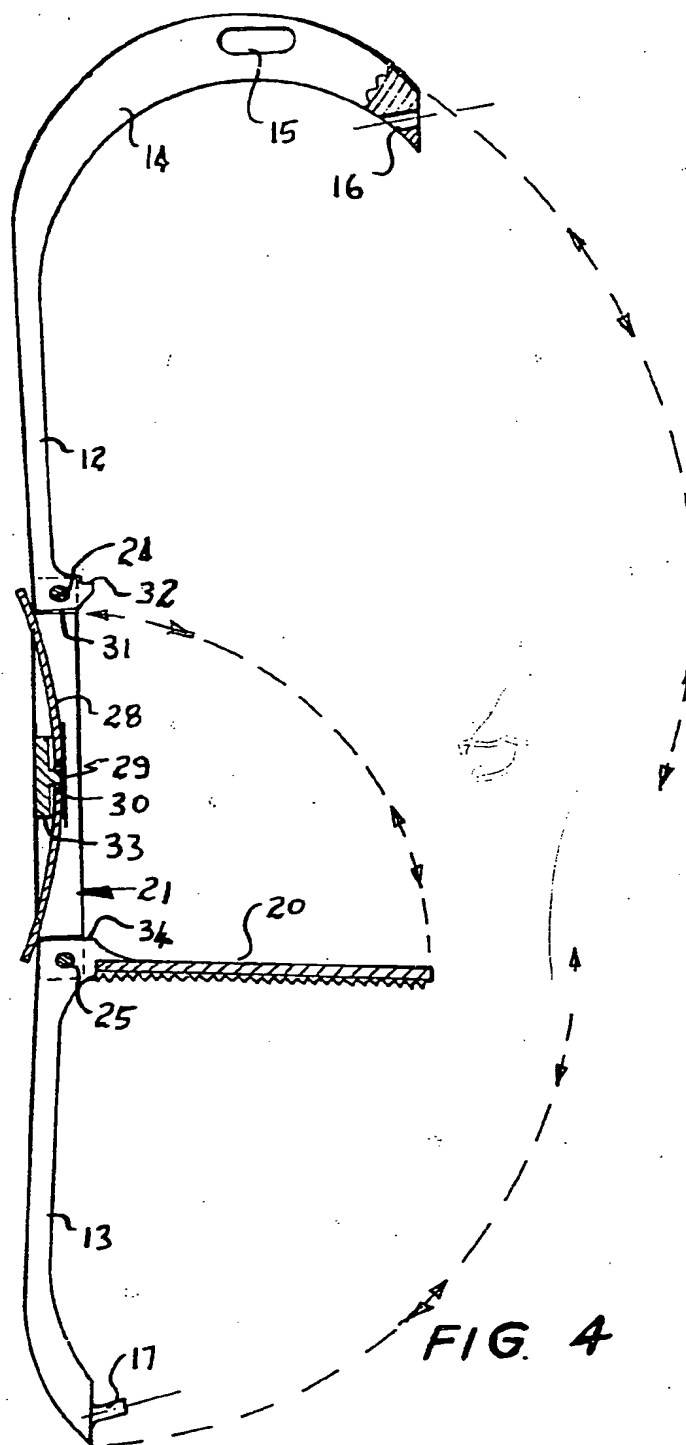

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.